


Fitting location for SHY ZIP® roof blind systems

All ZIP® roof blind systems (Hand, CTS, Wireless, FTS, electric or manual) create a good seal when deployed, potentially trapping a large amount of solar energy between the blind and glass leading the system to heat up. This may cause issues for the components compromising their longevity.

To mitigate these issues, SHY recommends minimum distances between the glass and fabric as follows: -


Flat Glass

The blind should be as far away from the roof as possible, but the absolute minimum distance between the glass and cloth should be 300mm.

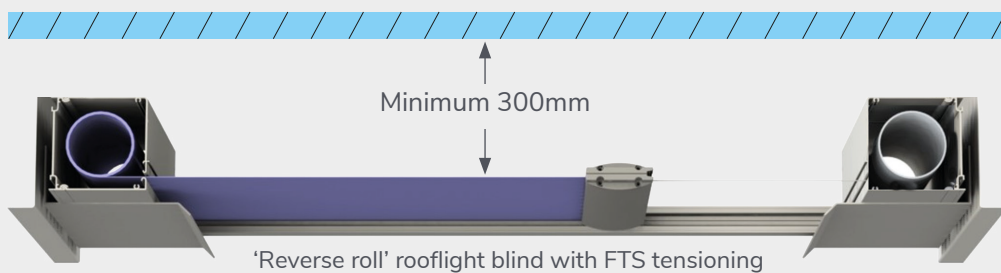

Lantern Roof

In this circumstance, the minimum distance between the lowest glass and the cloth should be 200mm.

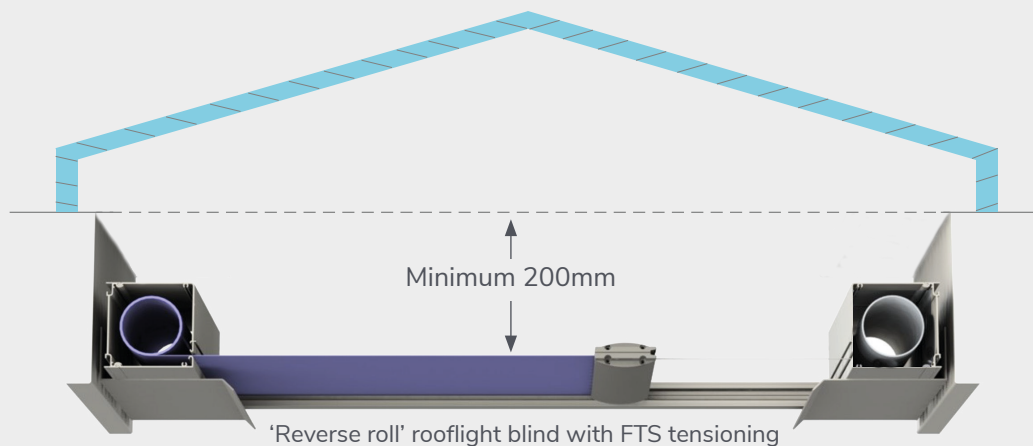

Fitting product closer than the above recommended distances, will result in no warranty support for the affected blind(s).

GET IN TOUCH...

UK T: 01462 455 400
Worldwide T: +44 1462 455 400
Email: info@shy.co.uk

Head Office
2B Dunhams Lane,
Letchworth, Herts, SG6 1BE

www.shy.co.uk